


## Pneumatic Quick Release Couplings

### P19 Series - UK Standard




### Features


- Standard: UK (PCL) Standard
- Sizes 1/4" - 3/8 - 1/2" and Barb
- Nominal flow diameter: 4.8mm
- Carbon steel
- NBR sealing
- Working Pressure: 1 Mpa
- Corrosion resistant plating- CR3
- Pneumatic tools, air compressors, measuring and control equipment
- Interchange: PCL AC standard, Cejn 295, Rectus 19KA

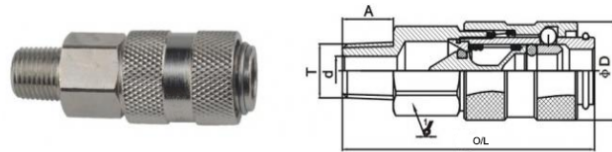


Part No.	O/L	D	Hex 1	A	T	d
P19-F-04GM	64.5	23.3	19	13	1/4	7
P19-F-06GM	63	23.3	19	13	3/8	11
P19-F-08GM	60.5	23.3	22	14	1/2	14

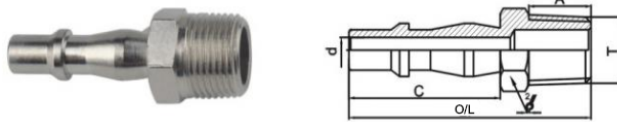


Part No.	O/L	C	Hex 1	A	T	d
P19-M-04GM	50.5	31.5	14	13	1/4	4.8
P19-M-06GM	51	31.5	17	13	3/8	4.8
P19-M-08GM	52	31.5	19	13	1/2	4.8

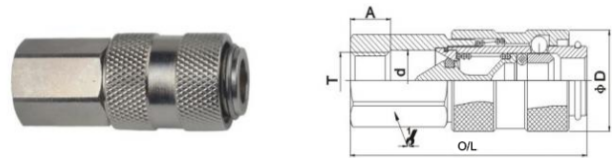


Part No.	O/L	D	Hex 1	A	T	d
P19-F-04GF	58.5	23.3	19	10	1/4	14
P19-F-06GF	57.5	23.3	19	10	3/8	14
P19-F-08GF	60.5	23.3	24	12	1/2	14

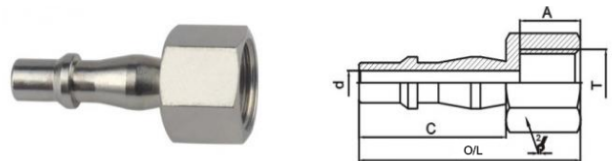

Part No.	O/L	C	Hex 1	A	T	d
P19-M-04GF	47.5	31.5	17	13	1/4	4.8
P19-M-06GF	47.5	31.5	19	13	3/8	4.8
P19-M-08GF	47.5	31.5	24	13	1/2	4.8



Part No.	O/L	D	Hex 1	A	T	d
P19-F-07B	73	23.3	19	20	7	4
P19-F-09B	76.5	23.3	19	25	9	5
P19-F-11B	76.5	23.3	19	25	11	7.5

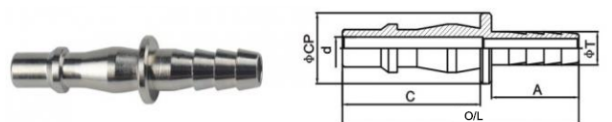

Part No.	O/L	C	Hex 1	A	T	d
P19-M-07B	54	31.5	15	20	7	4.8
P19-M-09B	59	31.5	15	25	9	4.8
P19-M-11B	59	31.5	15	25	11	4.8